



TM

SITE SPREADER

Model 2518

Portland cement, flyash, quicklime, bentonite or blends



The 25 ton hopper holds a whole tanker load. The optional engine allows for towing with any prime mover.

Adjustable openings on the bottom of the auger trough guarantee a level pattern from edge to edge.



Hydraulic reservoir, fuel tank and dust filter are mounted up front.



- **Load directly from the tanker or silo.**
- **Hopper can be sized to hold one full tanker load.**
- **Dust filter collects dust during loading.**
- **Dust curtains or spray bars control dust while spreading.**
- **Radar-driven application rate controller.**
- **Spread widths: 8-12 ft.**
 - *See Rate Chart on back.*

Patent Pending



Spread in high winds with little dust.



Basic rate controller and engine console for cab of tractor.



Optional radar controlled application rates.

Upgradable to full GPS control.



9" Pressure Relief set at 2psi - Standard.



Auxiliary engine package for extremely high rates.


Patent Pending



Filter can removes dust from vent air during filling.



Digital Scales

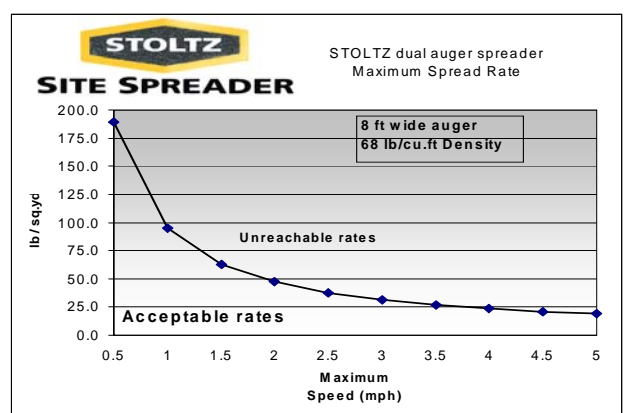

Example Chart

C.U. Stoltzfus Mfg., Inc.

Morgantown, PA USA 19543

Phone: 800-843-8731

+ 610-286-5146

www.cementspreaders.com

email: info@cementspreaders.com