



SITE SPREADERTM

Hydrated, portland, flyash, quicklime or bentonite



Truck-mounted or Pull-type



Control dust while spreading with NESCO spray bars.

Two auger styles:

Rugged break-away auger trough with manual width adjustment.



Or low-dust with hydraulic flaps.



- **Load directly from the tanker or silo.**
- **Hopper can be sized to hold one full tanker load.**
- **Dust filter collects dust during loading.**
- **Dust curtains or spray bars control dust while spreading.**
- **Radar-driven application rate controller.**
- **Spread widths: 8-12 ft.**
 - See Rate Chart on back.



Transfer portland cement at 1 ton per minute, without dust.



Spread in confined areas with minimum dust

Fill Control Options



Bin Monitors

Standard Safety Feature



9" Pressure Relief set at 2psi.




Filter can removes dust from vent air during filling.



Digital Scales



Radar controlled application rates

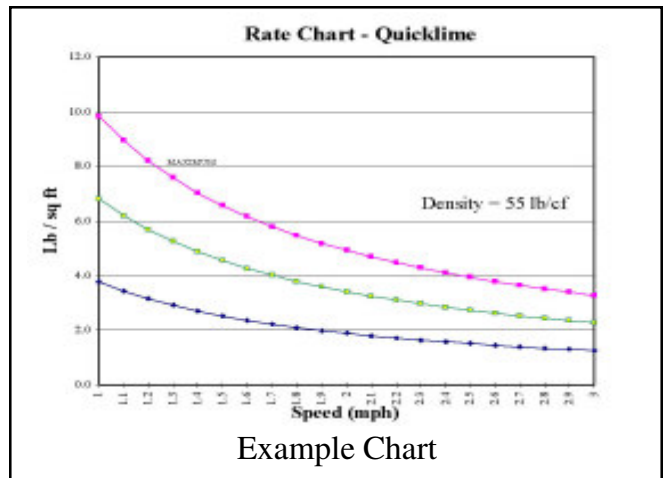

C.U. Stoltzfus Mfg., Inc.
Since 1945

Morgantown, PA 19543

Phone: 800-843-8731

www.stoltzfusmfg.com
email: info@stoltzfusmfg.com

Copyright 2005 C.U. Stoltzfus Mfg., Inc.